




# > **axr7+**

- Excellent printing quality and sensitivity
- Excellent resistance to smudge and scratch
- Good resistance to high temperature
- Receptor multi-compatibility


**AXR®7+ is the standard resin ribbon of the inkanto range.** Its high versatility (it also prints on coated papers), its performances (sharpness, printing speed) and its ability to widen the usual application fields of resin ribbons have resulted in making AXR®7+ the worldwide reference on this family of products.

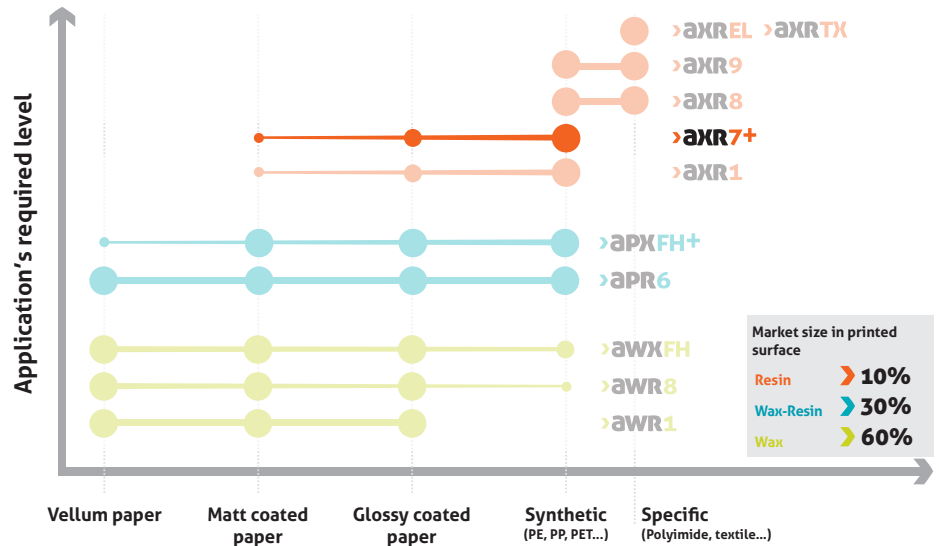


## Printing receptor

papers	synthetics
Coated ●●●	PP ●●●
Glossy coated ●●●	PE ●●●
	PET ●●●

## Printer settings

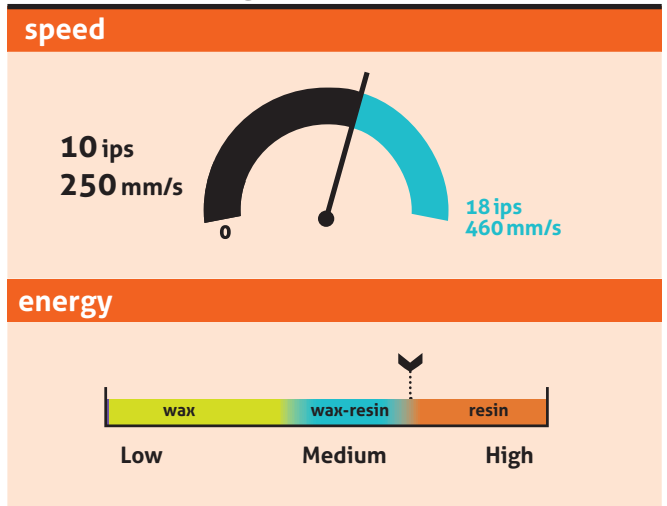

## Print resistance

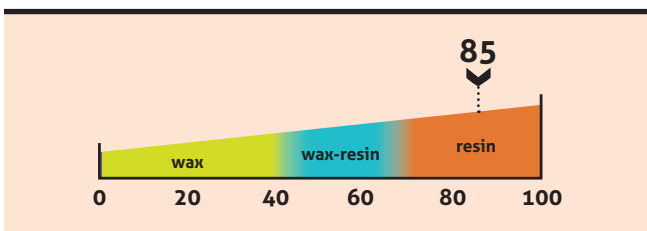

## Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
Halogen Restrictions



• Stoutenburgerweg 15 -B • 3784 VD • Terschuur • Tel. 0342-728728  
 • KvK: 65869281 • BTW: 8562.96.065.B.01 • NL 54 INGB 00073 62 1 24 •



## Application fields




## Product performance

print quality					
90°Barcode	95	A <sub>a</sub> Small characters	95	Logos	95
0°Barcode	100	2D Barcode	100	Blackness	1,7 ODR*
technical resistances					
Heat	180°C 356°F 300°C 572°F	Light/Blue Wool	>7	Solvents	60
Water/Submerge	100	Rubbing	95	Rubtester: 939g, no damage after ... cycles : IPA: 120 Ethanol: 25 Mineral Spirit: 60 Unleaded gasoline 98: nr* Motor oil: 250 Brake fluid: nr* *not recommended	

## Product physico-chemical features

product structure	
<b>PET film</b>	Thickness: 4,5 µm
<b>Ink</b>	Resin
Melting point	80°C/176°F
<b>Backcoating</b>	Silicon based
Coefficient of Friction	Kd < 0.2
<b>Ribbon thickness</b>	< 9 µm
The ribbon is anti static build-up treated	

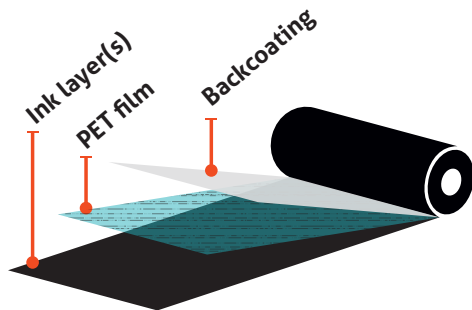

## Storage

### storage conditions

12 months recommended  
 20-80 % Humidity Rate, 5-35°C (40-95°F)

## Waste management

Qualityprinting rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.



• Stoutenburgerweg 15 -B • 3784 VD • Terschuur • Tel. 0342-728728  
 • KvK: 65869281 • BTW: 8562.96.065.B.01 • NL 54 INGB 00073 62 1 24 •



### › Warranty

This product is guaranteed for life against any manufacturing defect in normal conditions of use and storage.



### › Quality commitment

Easy to use with guaranteed product performance: the certificate of conformity for your product can be accessed via the flashcode on the box.



### › Easy to identify products:

The inkanto rolls families are identified by color codes. The roll labels highlight the important information about the product.



### › Your product is delivered with a cleaning wipe

To clean the print head and maintain the maximum performance of your printer.



### › Packing

Consistent packaging units depending on the roll dimensions.

## A certified and approved production site



### Quality, health & safety and environmental systems:

ISO 9001  
 OHSAS 18001  
 ISO 14001  
 ISO 50001 (France only)



### Responsible Care

The charter of the International Council of Chemical Associations for improvements in health & safety and the environment.



### Global Compact

UN initiative inviting companies to apply fundamental ethical and environmental values.